
WITH INTERSECTION TRAFFIC SIGNALS


WITH NEAR-SIDE TRAFFIC SIGNALS

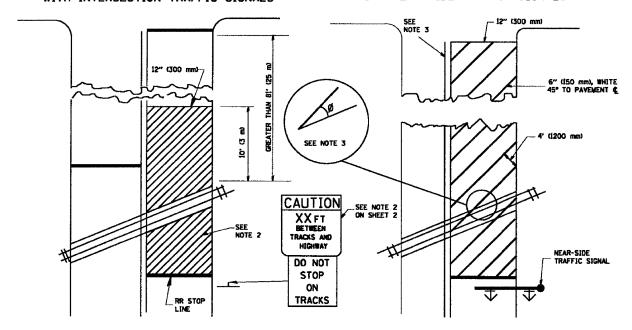

NOTES

- 1. PAVEMENT MARKINGS TO BE INSTALLED ONLY ON APPROACHES TO INTERSECTIONS CONTROLLED BY TRAFFIC SIGNALS WHICH ARE INTERCONNECTED WITH THE RAILROAD WARNING SIGNALS.
- 2. WHERE MEAR-SIDE TRAFFIC SIGNALS ARE USED, THE PAVEMENT WARKINGS EXTENDS TO THE INTERSECTION.
- 3. WHERE THE ANGLE BETWEEN THE DIAGONAL STRIPES AND THE TRACK (ID WOULD BE LESS THAN APPROXIMATELY 20°, THE STRIPES SHOULD BE SLOPED IN THE OPPOSITE DIRECTION FROM THAT SHOWN.

WITH NONSIGNALIZED INTERSECTION

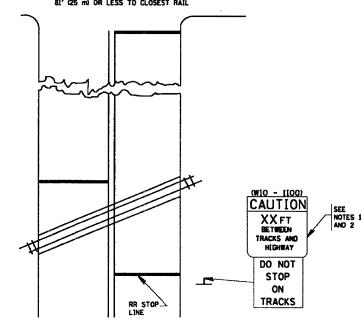

NOTE :

- 1. DISTANCE TO BE SHOWN ON SIGN MEASURED FROM A POINT 6 FEET (I.8 m) FROM THE RAIL CLOSEST TO THE INTERSECTION TO THE STOP LINE OR CROSSWALK, WHICHEVER IS CLOSEST, ROUNDED DOWN TO THE MEASURE FEET (I.8 m), WHERE THERE IS NO STOP LINE, MEASURE TO POINT WHERE THE DRIVER HAS A VIEW OF APPROACHING TRAFFIC.
- 2. THE CLEARANCE SIGN IS ALSO TO BE USED AS AN INTERIM MEASURE AT LOCATIONS WITH INTERCONNECTED INTERSECTION TRAFFIC SIGNALS WHERE IT IS PLANNED TO CHANGE TIME. IN THIS CASE, THE DISTANCE TO BE SHOWN ON THE SIGN IS MEASURED FROM THE EDGE OF THE STRIPPO-OUT AREA INSTEAD OF 6-FEET FROM THE RAIL, THE SIGN IS TO BE REMOVED WHEN THE MEAR-SIDE SIGNALS ARE INSTALLED AND THE PAVEMENT MARKINGS EXTEND TO THE INTERSECTION.

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

	FILE NAME =	USER NAME = geglienebt	DESIGNED -	REVISED 01-01-07		TOTAL AUDITEPATE MANINA AND DAUGETT HARIANA	F.A.P.	SECTION	COUNTY	TOTAL SHEET
1	W:\d:statd\22x34\to23.dgn		DRAWN:	REVISED -	STATE OF ILLINOIS	TYPICAL SUPPLEMENTAL SIGNING AND PAVEMENT MARKING	351 d	(535 R-6R & 536) RS-4	WILL	35 34
		PLOT SCALE = 50.000 '/ IN.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION	TREATMENT FOR RAILROAD CROSSINGS		TC-23	CONTRACT	NO 60H62
		PLOT DATE = 1/4/2008	DATE -	REVISED -		SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.	FED. ROAD	D DEST. NO. (ILLINOIS FED. A)		1102 00.102